

# **NORTH AMERICA INTERNATIONAL PATENT OFFICE**

P.O. BOX 506, Merrifield, VA 22116, U.S.A.

TEL: +886-2-8923-7350

FAX: 806-498-6673

e-mail: winstonhsu@naipo.com

**RECEIVED  
CENTRAL FAX CENTER**

**NOV 10 2004**

**FAX TO: Watko, Julie Anne**

**Tel.: (703) 305-7742**

**ART UNIT: 2652**

**Fax: (703) 872-9306**

**FROM: Winston Hsu, PATENT AGENT, REG. NO.: 41,526**

**SERIAL NO.: 10/063,948**

**ATTORNEY DOCKET NO.: WISP0013USA**

**SUBJECT: Response to the Office Action dated 08/10/2004**

**TOTAL PAGES: 45 PAGES (INCLUDING COVER PAGE)**

**Winston Hsu 2004/11/10**

**WARNING !! DUPLICATE COPY !!**

**Subject: Re-submission of a previous submitted fax**

Dear Sir or Madam,

This fax is a re-submission of a previous submitted fax which was sent to the above identified fax number at 04:42 AM, 11/10/2004. In the previous submission process, the fax machine failed to automatically generate a fax confirmation report. The undersigned agent has no idea whether the previous submission is completed or not. In order to avoid abandonment or delay of the correspondent U.S. patent application, the undersigned agent decides to resend this fax. If you find out that the previous fax submission is completed and the current fax becomes a redundant copy of the previous submitted fax, you can ignore this fax and use the previous fax as the formal response.

Thank you very much for your help.

**WISP0013USA0\_A2\_2**

**NORTH AMERICA  
INTERNATIONAL PATENT OFFICE**

**P.O. BOX 506, Merrifield, VA 22116, U.S.A.**

**Voice Mail: 302-729-1562**

**FAX: 806-498-6673**

**e-mail: winstonhsu@naipo.com**

**FAX TO: WATKO, JULIE ANNE      Tel.: (703) 305-7742  
ART UNIT: 2652                      Fax: (703) 872-9306**

**FROM: Winston Hsu, PATENT AGENT, REG. NO.: 41,526**

**SERIAL NO.: 10/063,948**

**ATTORNEY DOCKET NO.: WISP0013USA**

**SUBJECT: Response to the Office Action dated  
08/10/2004**

**TOTAL PAGES: 44 PAGES (INCLUDING COVER PAGE)**

**Winston Hsu    2004/11/10**

**WISP0013USA0\_A2\_2**

PTO/SB/97 (09-04)  
Approved for use through 07/31/2006. OMB 0651-0031  
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## Certificate of Transmission under 37 CFR 1.8

I hereby certify that this correspondence is being facsimile transmitted to the United States Patent and Trademark Office

on 11/10/2004  
Date

Celia Hsieh

Signature

Celia Hsieh

Typed or printed name of person signing Certificate

Voice Mail: 302-729-1562

Registration Number, if applicable

Telephone Number

Note: Each paper must have its own certificate of transmission, or this certificate must identify each submitted paper.

(1) Transmittal Form	1 PAGE
(2) Fee Transmittal	1 PAGE
(3) Response to Office action	10 PAGES
(4) Statement for the certified translation	2 PAGES
(5) Copy of certified translation of Taiwan application into English	28 PAGES

This collection of information is required by 37 CFR 1.8. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 1.9 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

PTO/SB/21 (09-04)


Approved for use through 07/31/2006. OMB 0651-0034

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>TRANSMITTAL FORM</b>  (to be used for all correspondence after initial filing)	Application Number	10/063,948	
	Filing Date	05/28/2002	
	First Named Inventor	Chin-Chuan Huang	
	Art Unit	2652	
	Examiner Name	WATKO, JULIE ANNE	
Total Number of Pages in This Submission	42	Attorney Docket Number	WISP0013USA

ENCLOSURES (Check all that apply)		
<input checked="" type="checkbox"/> Fee Transmittal Form <input type="checkbox"/> Fee Attached	<input type="checkbox"/> Drawing(s) <input type="checkbox"/> Licensing-related Papers	<input type="checkbox"/> After Allowance Communication to TC
<input checked="" type="checkbox"/> Amendment/Reply <input checked="" type="checkbox"/> After Final <input type="checkbox"/> Affidavits/declaration(s)	<input type="checkbox"/> Petition <input type="checkbox"/> Petition to Convert to a Provisional Application <input type="checkbox"/> Power of Attorney, Revocation <input type="checkbox"/> Change of Correspondence Address	<input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences <input type="checkbox"/> Appeal Communication to TC (Appeal Notice, Brief, Reply Brief)
<input type="checkbox"/> Extension of Time Request <input type="checkbox"/> Express Abandonment Request <input type="checkbox"/> Information Disclosure Statement	<input type="checkbox"/> Terminal Disclaimer <input type="checkbox"/> Request for Refund <input type="checkbox"/> CD, Number of CD(s) _____ <input type="checkbox"/> Landscape Table on CD	<input type="checkbox"/> Proprietary Information <input type="checkbox"/> Status Letter <input checked="" type="checkbox"/> Other Enclosure(s) (please identify below): 1. Statement for the certified translation 2. Copy of certified translation of Taiwan application into English
<input type="checkbox"/> Certified Copy of Priority Document(s) <input type="checkbox"/> Reply to Missing Parts/Incomplete Application <input type="checkbox"/> Reply to Missing Parts under 37 CFR 1.62 or 1.63	Remarks	

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT			
Firm Name	North America Intellectual Property Corporation		
Signature			
Printed name	Winston Hsu		
Date	NOV 10 2004	Reg. No.	41,526

CERTIFICATE OF TRANSMISSION/MAILING			
I hereby certify that this correspondence is being facsimile transmitted to the USPTO or deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on the date shown below:			
Signature			
Typed or printed name		Date	

This collection of information is required by 37 CFR 1.5. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

PTO/SB/17 (10-04)

Approved for use through 07/31/2006. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# FEE TRANSMITTAL for FY 2005

Effective 10/01/2004. Patent fees are subject to annual revision.

☐ Applicant claims small entity status. See 37 CFR 1.27

TOTAL AMOUNT OF PAYMENT

(\$ ) 0.00

## Complete if Known

Application Number	10/063,948
Filing Date	05/28/2002
First Named Inventor	Chin-Chuan Huang
Examiner Name	WATKO, JULIE ANNE
Art Unit	2652
Attorney Docket No.	WISP0013USA

## METHOD OF PAYMENT (check all that apply)

☐ Check ☐ Credit card ☐ Money Order ☐ Other ☐ None
☒ Deposit Account:Deposit Account Number  
50-3105Deposit Account Name  
North America Intellectual Property Corp.

The Director is authorized to: (check all that apply)

☒ Charge fee(s) indicated below ☒ Credit any overpayments☒ Charge any additional fee(s) or any underpayment of fee(s)☐ Charge fee(s) indicated below, except for the filing fee to the above-identified deposit account.

## FEE CALCULATION

## 1. BASIC FILING FEE

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
1001 790	2001 395	Utility filing fee	
1002 350	2002 175	Design filing fee	
1003 550	2003 275	Plant filing fee	
1004 790	2004 395	Reissue filing fee	
1005 160	2005 80	Provisional filing fee	
SUBTOTAL (1)			(\$ ) 0.00

## 2. EXTRA CLAIM FEES FOR UTILITY AND REISSUE

Total Claims	Extra Claims	Fee from below	Fee Paid
Independent	-20** =	X	
Multiple Dependent	-3** =	X	

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
1202 18	2202 9	Claims in excess of 20	
1201 88	2201 44	Independent claims in excess of 3	
1203 300	2203 150	Multiple dependent claim, if not paid	
1204 88	2204 44	** Reissue independent claims over original patent	
1205 18	2205 9	** Reissue claims in excess of 20 and over original patent	
SUBTOTAL (2)			(\$ ) 0.00

\*\*or number previously paid, if greater; For Reissues, see above

## FEE CALCULATION (continued)

## 3. ADDITIONAL FEES

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
1051 130	2051 65	Surcharge - late filing fee or oath	
1052 50	2052 25	Surcharge - late provisional filing fee or cover sheet	
1053 130	1033 130	Non-English specification	
1812 2,520	1812 2,520	For filing a request for ex parte reexamination	
1804 920*	1804 920*	Requesting publication of SIR prior to Examiner action	
1805 1,840*	1805 1,840*	Requesting publication of SIR after Examiner action	
1251 110	2251 55	Extension for reply within first month	
1252 430	2252 215	Extension for reply within second month	
1253 980	2253 490	Extension for reply within third month	
1254 1,530	2254 765	Extension for reply within fourth month	
1255 2,080	2255 1,040	Extension for reply within fifth month	
1401 340	2401 170	Notice of Appeal	
1402 340	2402 170	Filing a brief in support of an appeal	
1403 300	2403 150	Request for oral hearing	
1451 1,510	1451 1,510	Petition to institute a public use proceeding	
1452 110	2452 55	Petition to revive - unavoidable	
1453 1,330	2453 665	Petition to revive - unintentional	
1501 1,370	2501 685	Utility issue fee (or reissue)	
1502 490	2502 245	Design issue fee	
1503 660	2503 330	Plant issue fee	
1480 130	1480 130	Petitions to the Commissioner	
1807 50	1807 50	Processing fee under 37 CFR 1.17(q)	
1806 180	1806 180	Submission of Information Disclosure Stmt	
8021 40	8021 40	Recording each patent assignment per property (times number of properties)	
1809 790	2809 395	Filing a submission after final rejection (37 CFR 1.129(a))	
1810 790	2810 395	For each additional invention to be examined (37 CFR 1.129(b))	
1801 790	2801 395	Request for Continued Examination (RCE)	
1802 900	1802 900	Request for expedited examination of a design application	

Other fee (specify)

\*Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$ ) 0.00

## SUBMITTED BY

Name (Print/Type)	Winston Hsu	Registration No. (Attorney/Agent)	41,526	Telephone	302-729-1582
Signature	<i>Winston Hsu</i>	Date	NOV 10 2004		

**WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.**

This collection of information is required by 37 CFR 1.17 and 1.27. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

**RECEIVED**  
**CENTRAL FAX CENTER**  
**NOV 10 2004**

**OPTICAL DISK DRIVE MODULE FOR LIFTING UP AND LOWERING A DISK  
DRIVE**

Appl. No. : 10/063,948 Confirmation No. 9499  
Applicants : Chin-Chuan Huang,  
Chin-Yi Ko  
Filed : May 28, 2002  
TC/A.U. : 2652  
Examiner : Watko, Julie Anne  
Docket No. : WISP0013USA0  
Customer No. : 27765

Commissioner for Patents  
P.O. Box 1450  
Alexandria VA 22313-1450

**RESPONSE TO OFFICE ACTION**

Madame:

- 5 The following remarks are in response to the Office action of August 10, 2004.

Claims are listed beginning on page 2 of this paper.

Remarks/Arguments begin on page 9 of this paper.

An Appendix including documents for perfecting foreign priority is attached following page 10 of this paper.

Appl. No. 10/063,948  
Amdt. dated November 5, 2004  
Reply to Office action of August 10, 2004

**Listing of Claims:**

- 1 (previously presented): An optical disk drive module installed in a flat panel display  
personal computer for lifting up and lowering a disk drive, the flat panel display  
5 personal computer comprising a flat panel display, the optical disk drive module  
comprising:  
a chassis module disposed at a rear side of the flat panel display, the chassis module  
comprising:  
a chassis body;  
10 a first side plate and a second side plate formed at two sides of the chassis  
body and movably fastened to the rear side of the flat panel display, the  
first side plate having a first aperture, the second side plate having a  
second aperture facing the first aperture;  
a first gearwheel disposed on an inner wall of the first side plate; and  
15 a second gearwheel disposed on an inner wall of the second side plate facing  
the first gear, the first and second gearwheels having effectively equal  
radii D1; and  
a drive carrier rotatably disposed in the chassis module for positioning the disk drive,  
the drive carrier comprising:  
20 a carrier body; and  
a first side plate and a second side plate formed at two sides of the carrier body,  
the first side plate having a first protruded portion inserted into the first  
aperture of the first side plate of the chassis module, the second side  
plate having a second protruded portion inserted into the second aperture  
25 of the second side plate of the chassis module;  
wherein when the drive carrier swings away from the chassis module, the optical  
disk drive module will lower the disk drive to expose the disk drive below the  
flat panel display; and when the drive carrier moves toward the chassis

Appl. No. 10/063,948  
Amdt. dated November 5, 2004  
Reply to Office action of August 10, 2004

module, the optical disk drive module will lift up the disk drive to position the disk drive at the rear side of the flat panel display.

5 2 (previously presented): The optical disk drive module of claim 1 wherein:

the drive carrier further comprises:

a first positioning hook positioned at an upper end of the first side plate, and a second positioning hook positioned at an upper end of the second side plate;

10 a first gear disposed at one end of the first side plate for engaging with the first gearwheel; and

a second gear disposed at one end of the second side plate opposing the first gear for engaging with the second gearwheel, the first and second gears having effectively equal radii  $D2$  which is larger than  $D1$ ;

15 wherein when the drive carrier rotates with respect to the first protruded portion and the second protruded portion to swing away from the chassis module, the optical disk drive module will lower the disk drive to expose the disk drive below the flat panel display; and when the drive carrier rotates with respect to the first protruded portion and the second protruded portion to swing toward  
20 the chassis module, the optical disk drive module will raise up the disk drive to position the disk drive at the rear side of the flat panel display.

3 (original): The optical disk drive module of claim 2 further comprising a cover slidably fastened within the drive carrier, the cover comprising:

25 a cover body having a first positioning slot for receiving the first positioning hook, and a second positioning slot for receiving the second positioning hook so as to fasten the cover within the drive carrier; and  
a first side plate and a second side plate formed at two sides of the cover and outside of the disk drive so as to fix the cover outside of the disk drive,



Appl. No. 10/063,948  
Amdt. dated November 5, 2004  
Reply to Office action of August 10,2004

the first side plate and the second side plate being slidably disposed within the drive carrier so as to dispose the disk drive within the drive carrier.

5

4 (original): An optical disk drive module installed in a flat panel display personal computer for lifting up and lowering a disk drive, the flat panel display personal computer comprising a flat panel display, the optical disk drive module comprising:  
a chassis module disposed at a rear side of the flat panel display;  
10 a drive carrier rotatably disposed in the chassis module; and  
a cover fixed outside of the disk drive and slidably fastened within the drive carrier so as to position the disk drive in the drive carrier;  
wherein when the drive carrier swings away from the chassis module, the optical disk drive module will lower the disk drive to expose the disk drive below the  
15 flat panel display; and when the drive carrier moves toward the chassis module, the optical disk drive module will lift up the disk drive to position the disk drive at the rear side of the flat panel display.

15

5 (previously presented):The optical disk drive module of claim 4 wherein:

20

the chassis module comprises:

a chassis body;

a first side plate and a second side plate formed at two sides of the chassis body and movably fastened to the rear side of the flat panel display, the first side plate having a first aperture, the second side plate having a  
25 second aperture facing the first aperture;

25

a first gearwheel disposed on an inner wall of the first side plate; and  
a second gearwheel disposed on an inner wall of the second side plate facing the first gearwheel, the first and second gearwheels having effectively equal radii D1; and

Appl. No. 10/063,948  
Amdt. dated November 5, 2004  
Reply to Office action of August 10, 2004

the drive carrier comprises:

a carrier body; and

a first side plate and a second side plate formed at two sides of the carrier body, the  
5 first side plate having a first protruded portion inserted into the first aperture  
of the first side plate of the chassis module, the second side plate having a  
second protruded portion inserted into the second aperture of the second side  
plate of the chassis module.

10 6 (previously presented): A flat panel display personal computer comprising:

a flat panel display;

a computing module disposed on a rear side of the flat panel display and coupled to  
the flat panel display; and

an optical disk drive module disposed at the rear side of the flat panel display for  
15 lifting up and lowering a disk drive, the optical disk drive module comprising:

a chassis module disposed at the rear side of the flat panel display, the chassis  
module comprising:

a chassis body;

a first side plate and a second side plate formed at two sides of the  
20 chassis body and movably fastened to the rear side of the flat panel  
display, the first side plate having a first aperture, the second side  
plate having a second aperture facing the first aperture;

a first gearwheel disposed on an inner wall of the first side plate; and

a second gearwheel disposed on an inner wall of the second side plate

25 facing the first gearwheel, the first and second gearwheels having  
effectively equal radii D1; and

a drive carrier rotatably disposed in the chassis module for positioning the disk  
drive, the drive carrier comprising:

a carrier body; and

Appl. No. 10/063,948  
Amdt. dated November 5, 2004  
Reply to Office action of August 10, 2004

5 a first side plate and a second side plate formed at two sides of the carrier body, the first side plate having a first protruded portion inserted into the first aperture of the first side plate of the chassis module, the second side plate having a second protruded portion inserted into the second aperture of the second side plate of the chassis module;

10 wherein when the drive carrier swings away from the chassis module, the optical disk drive module will lower the disk drive to expose the disk drive below the flat panel display; and when the drive carrier moves toward the chassis module, the optical disk drive module will lift up the disk drive to position the disk drive at the rear side of the flat panel display.

15 7 (previously presented): The flat panel display personal computer of claim 6 wherein: the drive carrier further comprises:

20 a first positioning hook positioned at an upper end of the first side plate, and a second positioning hook positioned at an upper end of the second side plate;  
a first gear disposed at one end of the first side plate for engaging with the first gearwheel; and  
a second gear disposed at one end of the second side plate opposing the first gear for engaging with the second gearwheel, the first and second gears having effectively equal radii  $D2$  which is larger than  $D1$ ;

25 wherein when the drive carrier rotates with respect to the first protruded portion and the second protruded portion to swing away from the chassis module, the optical disk drive module will lower the disk drive to expose the disk drive below the flat panel display; and when the drive carrier rotates with respect to the first protruded portion and the second protruded portion to swing toward the chassis module, the optical disk drive module will raise up the disk drive

Appl. No. 10/063,948  
Amdt. dated November 5, 2004  
Reply to Office action of August 10, 2004

to position the disk drive at the rear side of the flat panel display.

8 (original): The flat panel display personal computer of claim 7 further comprising a  
5 cover slidably fastened within the drive carrier, the cover comprising:

a cover body having a first positioning slot for receiving the first positioning  
hook, and a second positioning slot for receiving the second positioning  
hook so as to fasten the cover within the drive carrier; and

10 a first side plate and a second side plate formed at two sides of the cover and  
outside of the disk drive so as to fix the cover outside of the disk drive,  
the first side plate and the second side plate being slidably disposed  
within the drive carrier so as to dispose the disk drive within the drive  
carrier.

15 9 (previously presented): The optical disk drive module of claim 5 wherein:  
the drive carrier further comprises:

a first positioning hook positioned at an upper end of the first side plate, and a  
second positioning hook positioned at an upper end of the second side  
plate;

20 a first gear disposed at one end of the first side plate for engaging with the first  
gearwheel; and

a second gear disposed at one end of the second side plate opposing the first  
gear for engaging with the second gearwheel, the first and second gears  
having effectively equal radii  $D2$  which is larger than  $D1$ ; and

25 the cover comprises:

a cover body having a first positioning slot for receiving the first positioning  
hook, and a second positioning slot for receiving the second positioning  
hook so as to fasten the cover within the drive carrier; and

a first side plate and a second side plate formed at two sides of the cover and

Appl. No. 10/063,948  
Amdt. dated November 5, 2004  
Reply to Office action of August 10,2004

5 outside of the disk drive so as to fix the cover outside of the disk drive,  
the first side plate and the second side plate being slidably disposed  
within the drive carrier so as to dispose the disk drive within the drive  
carrier;

10 wherein when the drive carrier rotates with respect to the first protruded portion and  
the second protruded portion to swing away from the chassis module, the  
optical disk drive module will lower the disk drive to expose the disk drive  
below the flat panel display; and when the drive carrier rotates with respect to  
the first protruded portion and the second protruded portion to swing toward  
the chassis module, the optical disk drive module will raise up the disk drive  
to position the disk drive at the rear side of the flat panel display.

Appl. No. 10/063,948  
Amdt. dated November 5, 2004  
Reply to Office action of August 10, 2004

**REMARKS/ARGUMENTS**

The applicant notes the allowance of claims 1-3 and 6-8. Claim 4 is rejected under 35 U.S.C as being anticipated by Lan (US 6,657,857).

5

To overcome the rejection of claim 4, a signed statement certifying the translation of Taiwan application No. 090124208 into English is attached. The Taiwan application is relied upon for foreign priority under 35 U.S.C 119(a)-(d).

10

The Taiwan application has been translated into English by Allen Lu, who is fluent in both Chinese and English. The translation into English, certified by Allen Lu is also attached, and provides proof that all subject matter contained in the instant US application was also taught in the corresponding Taiwan application.

15

Since the priority date of the Taiwan application is earlier than the earliest effective US filing date (01/29/2002) of the Lan (US 6,657,857) patent, the foreign priority papers, the attached translation, and the certified statement effectively overcome the rejection of claim 4 using the Lan patent. Claims 5 and 9 are dependent on claim 4, and should be allowed if claim 4 is allowed.

20

In view of the above, applicant respectfully requests that a timely Notice of Allowance be issued in this case.

Appl. No. 10/063,948  
Amdt. dated November 5, 2004  
Reply to Office action of August 10, 2004

Sincerely yours,

5



Date: NOV 10 2004

Winston Hsu, Patent Agent No. 41,526

P.O. BOX 506

Merrifield, VA 22116

10

U.S.A.

Voice Mail: 302-729-1562

Facsimile: 806-498-6673

e-mail : winstonhsu@naipo.com

(Please contact me by voice mail if you need a telephone communication.)

15

Attachments

Appl. No. 10/063,948  
Amdt. dated November 5, 2004  
Reply to Office action of August 10, 2004

**OPTICAL DISK DRIVE MODULE FOR LIFTING UP AND LOWERING A  
DISK DRIVE**

Appl. No. : 10/063,948 Confirmation No. 9499  
Applicants : Chin-Chuan  
Huang,  
Chin-Yi Ko  
Filed : May 28, 2002  
TC/A.U. : 2652  
Examiner : Watko, Julie  
Anne  
Docket No. : WISP0013USA0  
Customer No. : 27765

Commissioner for Patents  
P.O. Box 1450  
Alexandria VA 22313-1450

**CERTIFIED TRANSLATION OF TAIWAN APPLICATION INTO ENGLISH**

I hereby certify that the attached English document is an accurate translation of Taiwan  
5 application No. 090124208 into English. I am fluent in both Chinese and English, and  
certify that the attached English document is an accurate translation of the corresponding  
Taiwan patent application.



Appl. No. 10/063,948  
Amdt. dated November 5, 2004  
Reply to Office action of August 10, 2004

Allen Lu

Date: Nov. 5th 2004

Allen Lu

21F, 88, Sec.1, Hsin Tai Wu Rd.,

5 Hsichih, Taipei Hsien 221, Taiwan, R.O.C.

886-2-8691-2888 Ext. 2367

OPTICAL DISK DRIVE MODULE FOR LIFTING UP AND LOWERING A DISK  
DRIVE

BACKGROUND OF THE INVENTION

5

1. Field of the Invention

The present invention relates to an optical disk drive module, and more specifically, the present invention discloses an optical disk drive module for lifting up and  
10 lowering a disk drive.

2. Description of the Prior Art

In general, a desktop computer includes a display device and a computing module coupled with the display device. As  
15 a result of a separating design between the computing module and the display device, the desktop computer thus occupies a lot of space. Therefore, a liquid crystal display personal computer (LCD PC) is widely used for combining the computing module with the display device so as to occupy less space than  
20 the desktop computer.

Please refer to Fig.1. Fig.1 is a side view of a flat panel display personal computer 100 according to the prior art. The flat panel display personal computer 100 comprises a computing  
25 module 102, a flat panel display 104, and a chassis 106. A rear side of the flat panel display 104 is coupled with a side plate 102a of the computing module 102, and a bottom plate 102b of the computing module 102 is disposed on the chassis 106 so as to allow the chassis 106 to support the computing  
30 module 102 and the flat panel display 104. An LCD panel 107 is disposed at a front side of the flat panel display 104 for displaying image frames of the flat panel display personal computer 100. The computing module 102 comprises a motherboard 108, a central processing unit (CPU) 110, a random access

memory (RAM) 112, and a hard disk 114. The CPU 110, the RAM 112, and the hard disk 114 are all coupled with the motherboard 108. The CPU 110 is used to process information and data of the flat panel display personal computer 100, the RAM 112 is  
5 used to register the information and data for processing by the CPU 110, and the hard disk 114 is used to store the data.

The chassis 106 has an optical disk drive 116 installed inside the chassis 106 for accessing data of an optical disc  
10 positioned within the optical disk drive 116. However, the optical disk drive engages with the chassis 106 via a number of screws, meaning that a user must utilize a screwdriver or other auxiliary tools to install or detach the optical disk drive 116. If threads of the screws become worn or rusted,  
15 the user must spend more energy and time on installing and detaching the optical disk drive 116. Although the user can directly access the optical disk drive 116 at a right side of the flat panel display personal computer 100, it is a blemish in an otherwise perfect design that the optical disk drive  
20 116 cannot be hidden at the rear side of the flat panel display 104 while accessing the data of the optical disc. Unfortunately, the optical disk drive 116 can't read optical disc or, during the waiting state, allows the user of the optical disk drive 116, enclosed at the rear side of flat panel  
25 display 104, to view the flat panel display.

#### SUMMARY OF THE INVENTION

It is therefore a primary objective of the claimed invention to provide an optical disk drive module. The optical  
30 disk drive module is installed in a flat panel display personal computer for hiding the optical disk drive at a rear side of the flat panel display while accessing data of an optical disc so as to reduce occupied space of hardware. Furthermore, when a user wishes to operate the optical disk drive, the user can

also utilize the optical disk drive module to lower the optical disk drive.

5 The claimed invention, briefly summarized, discloses an optical disk drive module installed in a flat panel display personal computer for lifting up and lowering a disk drive. The optical disk drive module comprises a chassis module and a drive carrier. The chassis module is disposed at a rear side of a flat panel display of the flat panel display personal  
10 computer. The drive carrier is rotatably disposed in the chassis module for positioning the disk drive. A user can utilize the optical disk drive module to raise up the disk drive so as to position the disk drive at the rear side of the flat panel display. Similarly, the user can also utilize  
15 the optical disk drive module to lower the disk drive so as to expose the disk drive below the flat panel display.

These and other objectives and advantages of the claimed invention will no doubt become obvious to those of ordinary  
20 skill in the art after reading the following detailed description of the preferred embodiment that is illustrated in the various figures and drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

25 Fig.1 is a side view of a flat panel display personal computer according to the prior art.

Fig.2 is an exploded diagram of an optical disk drive module according to a preferred embodiment of the present invention.

30 Fig.3 is a perspective view of a disk drive fabricated with a cover and a drive carrier.

Fig.4 is an amplified view of a gearwheel engaging with a gear.

Fig.5 is an amplified side view of two gears when the two gears are staggered.

Fig.6 is a perspective view of the optical disk drive module when the optical disk drive module is enclosed.

Fig.7 is a perspective view of the optical disk drive module when the optical disk drive module is not enclosed.

5 Fig.8 is a perspective view of a flat panel display personal computer with the optical disk drive module when the optical disk drive module is enclosed.

Fig.9 is a perspective view of a flat panel display personal computer with the optical disk drive module when the optical  
10 disk drive module is not enclosed.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention provides an optical disk  
15 drive module installed in a flat panel display personal computer for lifting up and lowering a disk drive. The flat panel display personal computer comprises a flat panel display and a computing module coupled with a rear side of the flat panel display. The drive carrier  
20 is rotatably disposed in the chassis module. The cover is fixed outside the disk drive and slidably fastened within the drive carrier so as to position the disk drive inside the drive carrier.

25 Furthermore, when the drive carrier swings away from the chassis module, the optical disk drive module will lower the disk drive to expose the disk drive below the flat panel display, as the flat panel display becomes visible to the user. When the drive carrier moves toward the chassis module, the optical  
30 disk drive module will lift up the disk drive to position the disk drive at the rear side of the flat panel display, as the flat panel display becomes invisible to the user.

Please refer to Fig.2 and Fig.3. Fig.2 is an exploded

diagram of an optical disk drive module 202 according to a preferred embodiment of the present invention. Fig.3 is a perspective view of a disk drive fabricated with a cover and a drive carrier depicted in Fig.2. As shown in Fig.2, the optical disk drive module 202 comprises a chassis module 204, a drive carrier 206, a disk drive 208, and a cover 210.

The cover 210 comprises a cover body 210a and two side plates 210b and 210c. The cover body 210a and the side plates 210b, 210c can be formed in rectangular shapes. The side plates 210b and 210b are respectively formed at two sides of the cover body 210a for forming the U-shape cover 210 with the cover body 210a. Of course, the cover body 210a and the side plates 210b, 210c can also be formed monolithically. The side plate 210b has two openings 212a and 212b, and the side plate 210c also has two openings 212c and 212d. The cover body 210a has two positioning slots 214a and 214b positioned on a lower-right end and an upper-right end, respectively, for fastening with the drive carrier 206. Furthermore, the disk drive 208 comprises a side plate 208a with two fixing openings 216a and 216b, which are located corresponding to the openings 212a and 212b. The disk drive 208 also has a side plate 208b opposite to the side plate 208a with two fixing openings 216c and 216d, which are located corresponding to the openings 212c and 212d.

When a user places the cover 210 onto the disk drive 208 along an arrow direction 250, the openings 212a, 212b, 212c, and 212d exactly correspond to the fixing openings 216a, 216b, 216c, and 216d, respectively. Then, the user can utilize four screws to respectively pass through the openings 212a, 212b, 212c, and 212d and tightly lock the fixing openings 216a, 216b, 216c, and 216d, allowing the cover 210 to be detachably disposed on the disk drive 208.

It needs to be noted that the cover 210 is formed according to a shape of the disk drive 208, and locations and numbers of the openings of the cover 210 are in accordance with the locations and numbers of the fixing openings of the disk drive 208. The disk drive 208 can also be monolithically formed with the cover 210.

Furthermore, a user can insert an optical disc from a left side of the disk drive 208. For example, the disk drive 208 has a retractable tray (not shown) moveably installed within the disk drive 208 to allow insertion of an optical disc, which will be accessed by the disk drive 208 after the tray has entered the disk drive 208.

According to Fig. 2, the drive carrier 206 comprises a carrier body 206a and two side plates 206b and 206c respectively formed at two sides of the carrier body 206a for forming the U-shape drive carrier 206 with the carrier body 210a. Of course, the carrier body 206a and the side plates 206b and 206c can be formed in rectangular shapes and be monolithically formed. The side plate 206b has a positioning hook 218a positioned at an upper end of the side plate 206b, and the side plate 206c also has a positioning hook 218b positioned at an upper end of the side plate 206c. The positioning hooks 218a and 218b are used to respectively engage with the positioning slots 214a and 214b of the cover 210. Furthermore, right ends of the side plates 206b and 206c are both stretched out of the carrier body 206a and respectively have two stoppers 215a and 215b for pushing against a right side of the disk drive 208 and for further positioning the disk drive 208 so as to prevent the disk drive 208 from separating from the drive carrier 206.

After the cover 210 is positioned onto the disk drive 208,

the user pushes the disk drive 208 to slide into the drive carrier 206 along an arrow direction 260. After performing the aforementioned installation process, the positioning hooks 218a and 218b will exactly engage with the positioning slots 214a and 214b, the positioning hooks 218c and 218d will push against the left sides of the cover 210 and the disk drive 208, and the stoppers 215a and 215b will push against the right side of the disk drive 208 so as to slidably engage the cover 210 within the drive carrier 206 and to expose the switch hook 213 outside the drive carrier 206.

As shown in Fig.3, the disk drive 208 therefore can be slidably fastened within the drive carrier 206 via the cover 210. It needs to be noted that the present invention can also design the positioning slots corresponding to the positioning hooks 218a and 218b to reduce production costs of the cover 210. The user can directly insert a disk drive with positioning slots into the drive carrier 206, and the positioning hooks 218a and 218b will engage with the positioning slots of the disk drive so as to achieve a positioning effect. Additionally, the disk drive 208 and the drive carrier 206 can also be positioned using other engaging methods. That is, if the disk drive 208 needs to be detached from the drive carrier 206, the user only needs to release the positioning hooks 218a and 218b of the drive carrier 206, and the disk drive 208 can be pulled out of the drive carrier 206.

As shown in Fig.2 and Fig.3, a right end of the side plate 206b has a gear 220a positioned outside the stopper 215a, and a right end of the side plate 206c has a gear 220b positioned outside the stopper 215b. Furthermore, the side plates 206b and 206c further comprise two protruded portions 222a and 222b, respectively, for engaging with the chassis module 204, and two protruded pieces 217a and 217b respectively positioned



at upper ends of the side plates 206b and 206c.

The chassis module 204 comprises a chassis body 204a, and two side plates 204b and 204c. The chassis body 204a and the side plates 204b and 204c can be formed in rectangular shapes. The side plates 204b and 204c are respectively formed at two sides of the chassis body 204a for forming the U-shape chassis module 204 with the chassis body 204a. Of course, the chassis body 204a, and the side plates 204b and 204b can also be formed monolithically. Right ends of the side plates 204b and 204c are both stretched out of the chassis body 204a. Additionally, a gearwheel 224a is disposed on an inner wall of the right side of the side plate 206b for rotatably engaging with the gear 220a, and a gearwheel 224b facing the gearwheel 224a is disposed on an inner wall of the right side of the side plate 206c for rotatably engaging with the gear 220b.

It needs to be noted that the present invention can add retarding oil into the two gearwheels 224a and 224b for adjusting rotational speed of the gearwheels 224a and 224b. When too much retarding oil is added, the gearwheels 224a and 224b will rotate slowly, and when too little retarding oil is added, the gearwheels 224a and 224b will rotate fast. Furthermore, the side plates 204b and 204c have two apertures 226a and 226b for fastening to the protruded portions 226a and 226b, respectively. Please refer to Fig.4. Fig.4 is an amplified view of the gearwheel 224b engaging with the gear 220b. As shown in Fig.4, the gearwheel 224b is a perfect gear wheel and has a rotational radius D1 and a number of teeth T1. The gear 220b is a segmental gear wheel rotating with respect to the protruded portion 222b and has a rotational radius D2 and a number of teeth T2.

If the gearwheel 224b and the gear 220b have respective rotational speeds V1 and V2, the ratio of V2/V1 is effectively

equal to the ratio of  $D2/D1$  and is also equal to the ratio of  $T2/T1$ . To achieve an effect of deceleration when the drive carrier 204 is in an open state, the present invention must design the value of  $V1$  to be less than the value of  $V2$ . Similarly,  
5 the present invention must design a rotational radius (222a) of the gear 220a to be larger than a rotational radius of the gearwheel 224a. Furthermore, the gears 220a and 220b have effectively equal radii  $D2$ , and the gearwheels 224a and 224b also have effectively equal radii  $D1$ .

10

It needs to be noted that the total number of teeth of the gears 220a and 220b must be designed to be enough for respectively engaging with the gearwheels 224a and 224b when the drive carrier 206 is not enclosed. Please refer to Fig.5.  
15 Fig.5 is an amplified side view of the two gears 220a and 220b when the two gears 220a and 220b are staggeringly installed. To maintain constant opening and closing speeds, the present invention especially disposes the gears 220a and 220b staggeringly so as to prevent the drive carrier 206 from having  
20 unstable opening and closing speeds. As shown in Fig.5, if the drive carrier 206 has a center of gravity  $G$  located at a central line  $L$  of the drive carrier 206, the present invention must design the protruded portion 222a to be positioned between the center of gravity  
25  $G$  and the gear 220a. Similarly, the protruded portion 222b of Fig.2 must be positioned between the center of gravity  $G$  and the gear 220b. Therefore, the drive carrier 206 will rotate by using the protruded portions 222a and 222b as pivots to move downward slowly due  
30 to the gravity of the drive carrier 206 itself. Simultaneously, the gears 220a and 220b can rotate with respect to the protruded portions 222a and 222b function as the pivots to move upward slowly, and further drive the gearwheels 224a and 224b to rotate.

To control retractable extent of the drive carrier 206, the present invention provides two chassis stoppers 228a and 228b respectively disposed on the upper ends of the side plates 204b and 204c to push against the protruded pieces 217a and 217b after the drive carrier 206 is swung away from the chassis module 204. The present invention further provides two chassis stoppers 228c and 228d respectively disposed on the lower ends of the side plates 204b and 204c to push against the gears 220a and 220b after the drive carrier 206 is swung toward the chassis module 204. Therefore, the chassis stoppers 228a, 228b, 228c, and 228d are used to control swinging angles of the drive carrier 206 and maintain engaging states of the gears 220a and 220b engaging with the gearwheels 224a and 224b.

After the user places the drive carrier 206 within the chassis module 204 along an arrow direction 270, the gears 220a and 220b are respectively engaged with the gearwheels 224a and 224b, and the protruded portions 222a and 222b are respectively engaged with the apertures 226a and 226b so as to detachably dispose the drive carrier 206 within the chassis module 204. That is, the optical disk drive module 202 is formed by the chassis module 204, drive carrier 206, the disk drive 208, and the cover 210.

Please refer to Fig.6. Fig.6 is a perspective view of the optical disk drive module 202 when the optical disk drive module 202 is enclosed. As shown in Fig.6, the cover 210 is secured onto the disk drive 208, the disk drive 208 is engaged within the drive carrier 206 via the cover

210, and the drive carrier 206 joins with the chassis module 204. When the drive carrier 206 is enclosed, that is, when the cover body 210a is parallel with the chassis body 204a, or the lower side of the side plate 206b overlaps with the lower side of the side plate 204b, teeth of an upper portion of the gear 220b are engaged with the gearwheel 224b, and a lower portion of the gear 220b is pushed against the chassis stopper 228d. Of course, teeth of an upper portion of the gear 220a are also engaged with the gearwheel 224a, and a lower portion of the gear 220a is pushed against the chassis stopper 228c. If a user takes a look at the optical disk drive module 202 from the left side of the optical disk drive module 202, the user can notice that the disk drive 208 and the drive carrier 206 form a streamline-shape mechanism with the chassis module 204. Furthermore, the user can also install a fastening switch on an upper end of the optical disk drive module 202 to engage with the carrier body 206a and the cover body 204a to display the enclosed state of the optical disk drive module 202.

The disk drive 208 and the cover 210 are both disposed within the drive carrier 206, so when the user unlocks the fastening switch, the drive carrier 206, the disk drive 208, and the cover 210 will slowly rotate along an arrow direction 650 by using the protruded portions 222a and 222b as pivots. The gears 220b and 220a will relatively rotate with the gearwheels 224b and 224a. Since the rotational radii of the gears 220a and 220b are larger than the rotational radii of the gearwheels 224a and 224b, and the retarding oil is added into the gearwheels 224a and 224b, the drive carrier 206 is rotated smoothly.

During a slow rotating process of the drive carrier 206 rotating along the arrow direction 650, the protruded pieces 217a and 217b will push against the chassis stoppers 228a and 228b to make the drive carrier 206 stop moving so as to allow the disk drive 208 to be used by the user. Furthermore, the gears 220a and 220b will respectively engage with the gearwheels 224a and 224b to display the open state of the optical disk drive module 202. Please refer to Fig.7. Fig.7 is a perspective view of the optical disk drive module 202 when the optical disk drive module 202 is not enclosed. As shown in Fig.7, the cover body 210a forms an angle with the chassis body 204a. That is, the lower end of the side plate 206b forms an angle  $\Theta$  with the lower end of the side plate 204b. Of course, the user can also slowly move the drive carrier 206 upward along an arrow direction 750 so as to allow the drive carrier 206 to slowly rotate with respect to the protruded portions 222a and 222b along the arrow direction 750. Then, the optical disk drive module 202 will be restored to the enclosed state as shown in Fig.6. Additionally, the user can also lock the fastening switch locating on the upper end of the optical disk drive module 202 to fasten to the carrier body 206a and the chassis body 204a so as to prevent the protruded portions 222a and 222b from swinging away from the chassis module 204.

The optical disk drive module 202 can also be installed in a flat panel display personal computer. Please refer to Fig.8. Fig.8 is a perspective view of a flat panel display personal computer 800 with the optical disk drive module 202 depicted in Fig.6. As shown in Fig.8, the flat panel display personal computer 800 comprises a computing module 802, a flat panel display 804, a

chassis 806, and the optical disk drive module 202. A rear side of the flat panel display 804 is fastened with a side plate 802a of the computing module 802, and a side plate 802b of the computing module 802 is  
5 disposed on the chassis 806 so as to allow the chassis 806 to support the computing module 802 and the flat panel display 804, and to allow the flat panel display personal computer 800 to stably stand on a top of a table.

10

The present optical disk drive module 202 can also be installed at a rear side of the flat panel display 804 or within the chassis 806. If the optical disk drive module 202 is installed at the rear side of the flat panel display  
15 804, left sides of the side plates 204b and 204c are fastened to the rear side of the flat panel display 804. The present invention will use the optical disk drive module 202 installed within the chassis 806 as an example. When a user takes a look at the flat panel display  
20 personal computer 800 from a left side of the flat panel display personal computer 800, the disk drive 208 is positioned at the rear side of the flat panel display 804 so that the user cannot see the disk drive 208. The characteristic allows the flat panel display  
25 personal computer 800 to have a more streamlined shape than the flat panel display personal computer 100 depicted in Fig.1. Of course, the present invention can also install a fastening switch 808 on the optical disk drive module 202 for fastening with the drive carrier  
30 206 and the chassis module 204, so as to maintain the closed state of the optical disk drive module 202.

When the user wishes to use the disk drive 208, the user only needs to unlock the fastening switch 808 so

as to allow the drive carrier 206 with the disk drive 208 to rotate by using the protruded portion 222a as a pivot to slowly move downward along an arrow direction 850. In addition, design of the gear 220a and the gearwheel 224a will enable the drive carrier 206 and the disk drive 208 to smoothly move downward. Of course, the disk drive 208 will be exposed below the flat panel display 804 to allow the user to see the disk drive 208 from the left side of the flat panel display personal computer 800 as shown in Fig.9, and to directly place an optical disc on the disk drive 208.

Please refer to Fig.9. Fig.9 is a perspective view of the flat panel display personal computer 800 with the optical disk drive module 202 when the optical disk drive module 202 is not enclosed. As shown in Fig.9, after the user places the optical disc inside the disk drive 208, the user can push the drive carrier 206 and the disk drive 208 upward slowly along an arrow direction 950 so as to allow the fastening switch 808 to engage the drive carrier 206 with the chassis module 204 as shown in Fig.8. Then, the optical disc can be accessed, and the disk drive 208 is concealed at the rear side of the flat panel display.

In contrast to the prior art, the present flat panel display personal computer can conceal the disk drive at the rear side of the flat panel display when the disk drive accesses an optical disc or is in a waiting state so as to reduce space occupied by hardware. The flat panel display personal computer can also utilize the optical disk drive module to lower the disk drive so as to show the disk drive at the front side of the flat panel display.

Technologies of the present invention are not limited by the above description. For example, the disk drive 208 can be a CD-ROM drive, a DVD-ROM player, a CD burner, a DVD-ROM burner, or a portable hard disk.

5

#### Advantages of the present invention

The embodiment of present invention discloses many of the following advantages:

- 10 1. The optical drive module is easily assembled and the optical drive is easily swappable. When the user wishes to swap the optical drive, the user needs to only unfasten the positioning hook from the side plate.
2. With the design of the rotational radius of gear is greater than rotational radius of gearwheel,
- 15 the optical drive can slowly drops down from the side plates, and the drive carrier can open and encloses slowly from the side plates.
3. To control the turning speed of the gearwheel, the retarding oil can be added to the gearwheel.
- 20 4. To control retractable extent of the drive carrier, the design of the gear's teeth engages with the gearwheel's teeth.
5. The present embodiment enables the drive to be hidden inside the computer system as a space-saving
- 25 measure. Also, the streamlined body design gives an aesthetic look to the computer system.

Those skilled in the art will readily observe that numerous modifications and alterations of the device may be made while

30 retaining the teachings of the invention. Accordingly, the above disclosure should be construed as limited only by the metes and bounds of the appended claims.



## CLAIMS

What is claimed is:

- 5 1. An optical disk drive module installed in a flat panel display personal computer for lifting up and lowering a disk drive, the flat panel display personal computer comprising a flat panel display, the optical disk drive module comprising:
- 10 a chassis module disposed at a rear side of the flat panel display; and
- a drive carrier rotatably disposed in the chassis module for positioning the disk drive;
- wherein when the drive carrier swings away from the chassis
- 15 module, the optical disk drive module will lower the disk drive to expose the disk drive below the flat panel display; and when the drive carrier moves toward the chassis module, the optical disk drive module will lift up the disk drive to position the disk drive at
- 20 the rear side of the flat panel display.
2. The optical disk drive module of claim 1 wherein: the chassis module comprises:
- a chassis body;
- 25 a first side plate and a second side plate formed at two sides of the chassis body and movably fastened to the rear side of the flat panel display, the first side plate having a first aperture, the second side plate having a second aperture facing
- 30 the first aperture;
- a first gearwheel disposed on an inner wall of the first side plate; and
- a second gearwheel disposed on an inner wall of the second side plate facing the first gear, the first

and second gearwheels having effectively equal radii  $D_1$ ; and

the drive carrier comprises:

a carrier body;

5 a first side plate and a second side plate formed at two sides of the carrier body, the first side plate having a first protruded portion inserted into the first aperture of the first side plate of the chassis module, the second side plate having a  
10 second protruded portion inserted into the second aperture of the second side plate of the chassis module;

a first positioning hook positioned at an upper end of the first side plate, and a second positioning  
15 hook positioned at an upper end of the second side plate;

a first gear disposed at one end of the first side plate for engaging with the first gearwheel; and

a second gear disposed at one end of the second side  
20 plate opposing the first gear for engaging with the second gearwheel, the first and second gears having effectively equal radii  $D_2$  which is larger than  $D_1$ ;

wherein when the drive carrier rotates with respect to  
25 the first protruded portion and the second protruded portion to swing away from the chassis module, the optical disk drive module will lower the disk drive to expose the disk drive below the flat panel display; and when the drive carrier rotates with respect to the  
30 first protruded portion and the second protruded portion to swing toward the chassis module, the optical disk drive module will raise up the disk drive to position the disk drive at the rear side of the flat panel display.

3. The optical disk drive module of claim 2 further comprising a cover slidably fastened within the drive carrier, the cover comprising:

5           a cover body having a first positioning slot for receiving the first positioning hook, and a second positioning slot for receiving the second positioning hook so as to fasten the cover within the drive carrier; and

10           a first side plate and a second side plate formed at two sides of the cover and outside of the disk drive so as to fix the cover outside of the disk drive, the first side plate and the second side plate being slidably disposed within the drive carrier

15           so as to dispose the disk drive within the drive carrier.

4. An optical disk drive module installed in a flat panel display personal computer for lifting up and lowering a disk drive, the flat panel display personal computer comprising a flat panel display, the optical disk drive module comprising:
- 20           a chassis module disposed at a rear side of the flat panel display;

          a drive carrier rotatably disposed in the chassis module;

25           and

          a cover fixed outside of the disk drive and slidably fastened within the drive carrier so as to position the disk drive in the drive carrier;

30           wherein when the drive carrier swings away from the chassis module, the optical disk drive module will lower the disk drive to expose the disk drive below the flat panel display; and when the drive carrier moves toward the chassis module, the optical disk drive module will

lift up the disk drive to position the disk drive at the rear side of the flat panel display.

5. The optical disk drive module of claim 4 wherein:

5 the chassis module comprises:

a chassis body;

a first side plate and a second side plate formed at two sides of the chassis body and movably fastened to the rear side of the flat panel display, the first side plate having a first aperture, the second side plate having a second aperture facing the first aperture;

a first gearwheel disposed on an inner wall of the first side plate; and

15 a second gearwheel disposed on an inner wall of the second side plate facing the first gearwheel, the first and second gearwheels having effectively equal radii  $D_1$ ;

the drive carrier comprises:

20 a carrier body;

a first side plate and a second side plate formed at two sides of the carrier body, the first side plate having a first protruded portion inserted into the first aperture of the first side plate of the chassis module, the second side plate having a second protruded portion inserted into the second aperture of the second side plate of the chassis module;

25 a first positioning hook positioned at an upper end of the first side plate, and a second positioning hook positioned at an upper end of the second side plate;

30 a first gear disposed at one end of the first side plate for engaging with the first gearwheel; and

a second gear disposed at one end of the second side plate opposing the first gear for engaging with the second gearwheel, the first and second gears having effectively equal radii D2 which is larger than D1; and

the cover comprises:

a cover body having a first positioning slot for receiving the first positioning hook, and a second positioning slot for receiving the second positioning hook so as to fasten the cover within the drive carrier; and

a first side plate and a second side plate formed at two sides of the cover and outside of the disk drive so as to fix the cover outside of the disk drive, the first side plate and the second side plate being slidably disposed within the drive carrier so as to dispose the disk drive within the drive carrier;

wherein when the drive carrier rotates with respect to the first protruded portion and the second protruded portion to swing away from the chassis module, the optical disk drive module will lower the disk drive to expose the disk drive below the flat panel display; and when the drive carrier rotates with respect to the first protruded portion and the second protruded portion to swing toward the chassis module, the optical disk drive module will raise up the disk drive to position the disk drive at the rear side of the flat panel display.

30

6. A flat panel display personal computer comprising:
  - a flat panel display;
  - a computing module disposed on a rear side of the flat panel display and coupled to the flat panel display;

and

an optical disk drive module disposed at the rear side of the flat panel display for lifting up and lowering a disk drive, the optical disk drive module

5 comprising:

a chassis module disposed at the rear side of the flat panel display; and

a drive carrier rotatably disposed in the chassis module for positioning the disk drive;

10 wherein when the drive carrier swings away from the chassis module, the optical disk drive module will lower the disk drive to expose the disk drive below the flat panel display; and when the drive carrier moves toward the chassis module, the optical disk drive module will  
15 lift up the disk drive to position the disk drive at the rear side of the flat panel display.

7. The flat panel display personal computer of claim 1 wherein:

20 the chassis module comprises:

a chassis body;

a first side plate and a second side plate formed at two sides of the chassis body and movably fastened to the rear side of the flat panel display, the  
25 first side plate having a first aperture, the second side plate having a second aperture facing the first aperture;

a first gearwheel disposed on an inner wall of the first side plate; and

30 a second gearwheel disposed on an inner wall of the second side plate facing the first gearwheel, the first and second gearwheels having effectively equal radii  $D_1$ ; and

the drive carrier comprises:

a carrier body;  
a first side plate and a second side plate formed at  
two sides of the carrier body, the first side plate  
having a first protruded portion inserted into the  
5 first aperture of the first side plate of the  
chassis module, the second side plate having a  
second protruded portion inserted into the second  
aperture of the second side plate of the chassis  
module;  
10 a first positioning hook positioned at an upper end  
of the first side plate, and a second positioning  
hook positioned at an upper end of the second side  
plate;  
a first gear disposed at one end of the first side plate  
15 for engaging with the first gearwheel; and  
a second gear disposed at one end of the second side  
plate opposing the first gear for engaging with  
the second gearwheel, the first and second gears  
having effectively equal radii  $D2$  which is larger  
20 than  $D1$ ;  
wherein when the drive carrier rotates with respect to  
the first protruded portion and the second protruded  
portion to swing away from the chassis module, the  
optical disk drive module will lower the disk drive  
25 to expose the disk drive below the flat panel display;  
and when the drive carrier rotates with respect to the  
first protruded portion and the second protruded  
portion to swing toward the chassis module, the  
optical disk drive module will raise up the disk drive  
30 to position the disk drive at the rear side of the flat  
panel display.

8. The flat panel display personal computer of claim 7 further comprising a cover slidably fastened within the drive

carrier, the cover comprising:-

a cover body having a first positioning slot for receiving the first positioning hook, and a second positioning slot for receiving the second positioning hook so as to fasten the cover within the drive carrier; and

a first side plate and a second side plate formed at two sides of the cover and outside of the disk drive so as to fix the cover outside of the disk drive, the first side plate and the second side plate being slidably disposed within the drive carrier so as to dispose the disk drive within the drive carrier.



## ABSTRACT OF THE DISCLOSURE

An optical disk drive module installed in a flat panel display personal computer is provided for lifting up and lowering a disk drive. The optical disk drive module includes a chassis module and a drive carrier. The chassis module is disposed at a rear side of a flat panel display of the flat panel display personal computer. The drive carrier is rotatably disposed in the chassis module for positioning the disk drive. A user can utilize the optical disk drive module to raise up the disk drive so as to position the disk drive at the rear side of the flat panel display. Similarly, the user can also utilize the optical disk drive module to lower the disk drive so as to expose the disk drive below the flat panel display.

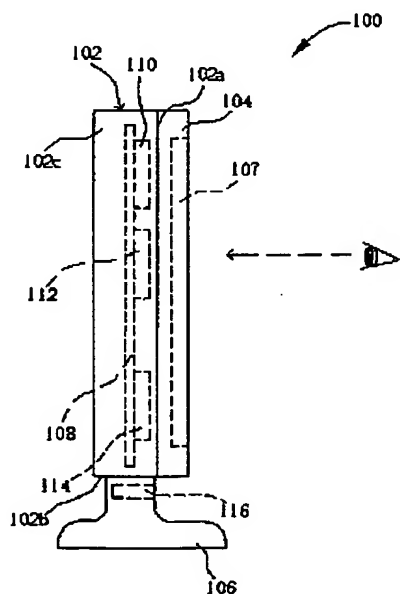


Fig. 1 Prior art

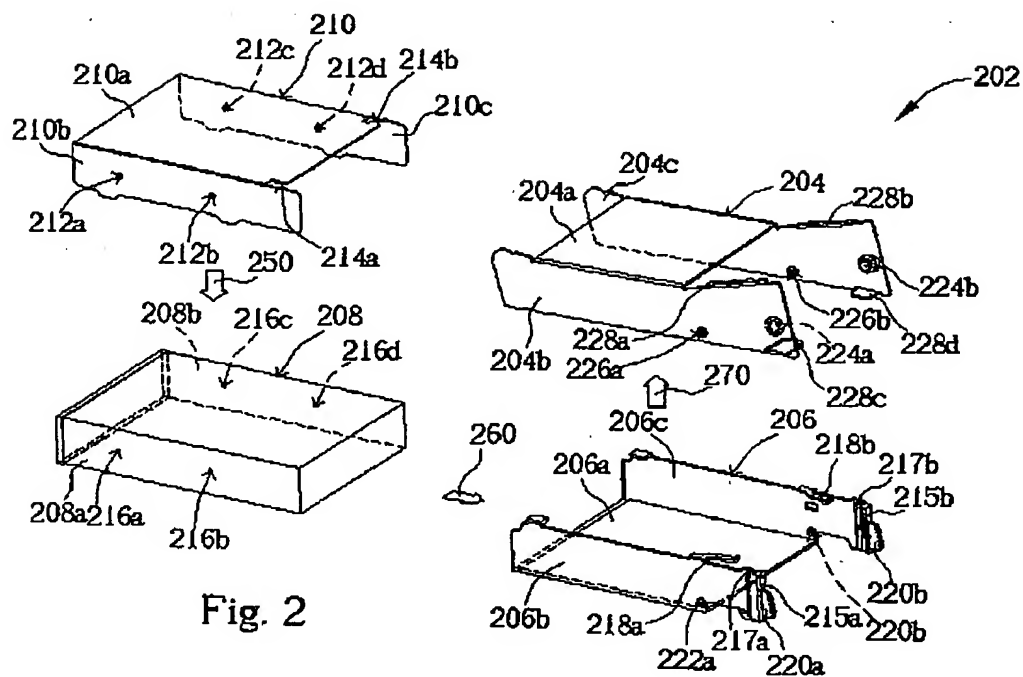


Fig. 2

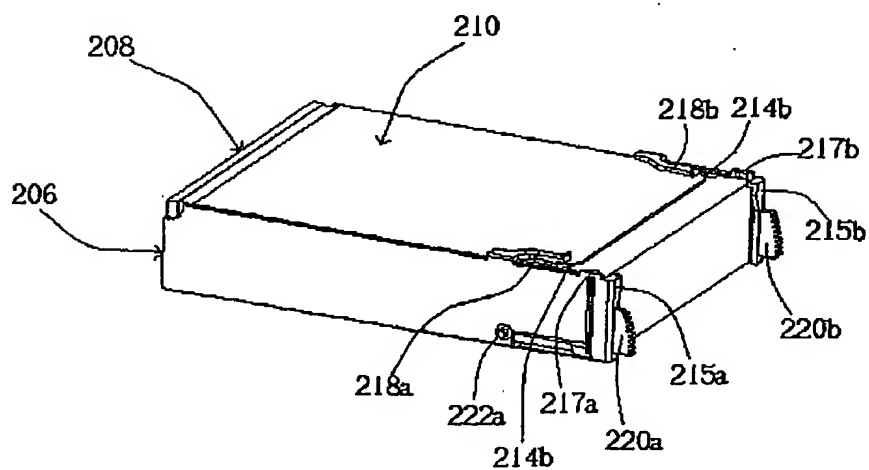


Fig. 3

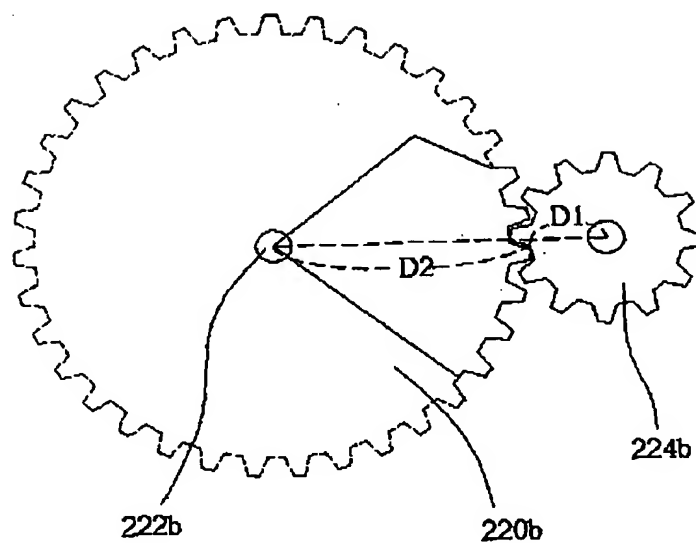


Fig. 4

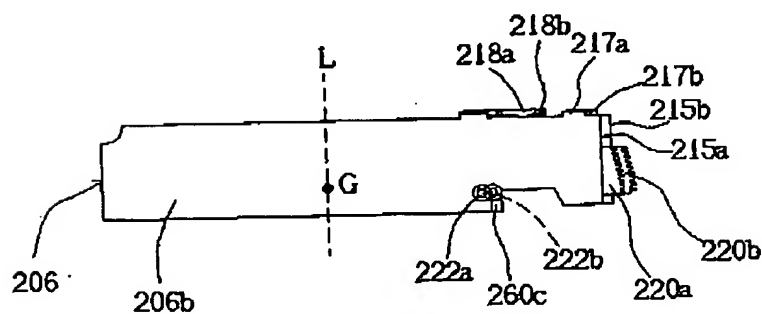


Fig. 5

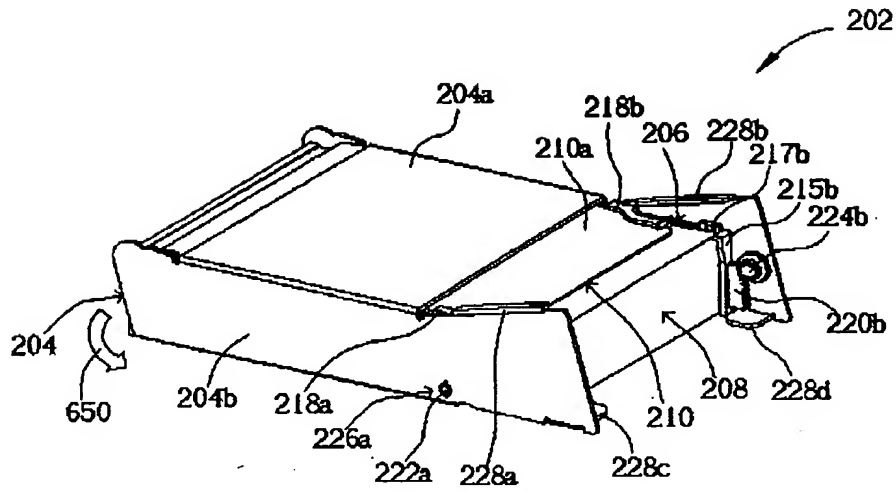


Fig. 6

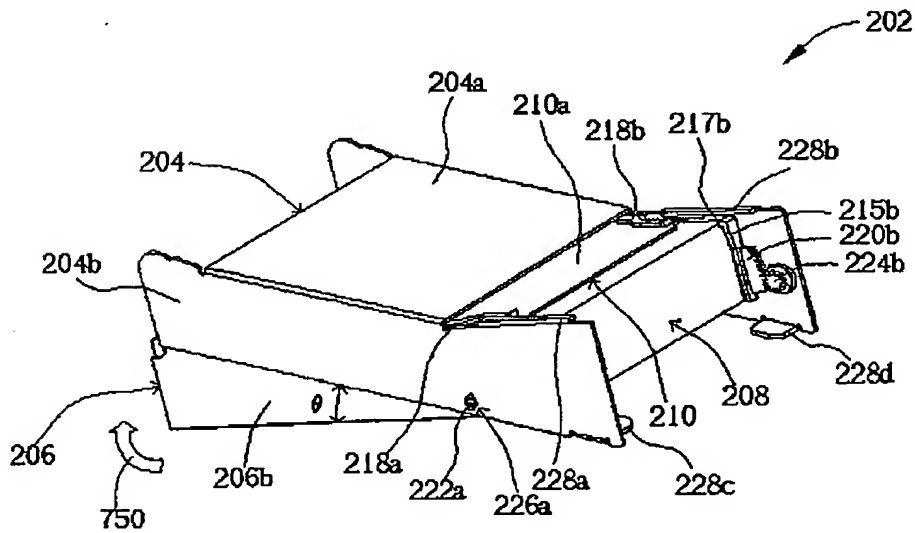


Fig. 7

